

Over 30 years' experience in the bakery business makes Gemini Bakery Equipment Company a reliable partner able to satisfy all your individual wishes.

Together with resources from our international partners, Gemini's technical and engineering personnel can develop new ideas and concepts to meet your bakery's needs.

Take profit of it!

D-Series Deck Oven



Creative Technology and Service for the Baking Industry

In an effort to consistently upgrade our products, we reserve the right to change specifications and dimensions without notice.

Gemini Bakery Equipment Company
9990 Gantry Road
Philadelphia, PA 19115-1002
(215) 673-3520 Fax: (215) 673-3944
sales@geminibe.com
www.geminibe.com



MJ Revised Nov 2017



Since 1972

Standard Features

- Electric deck oven
- Glass doors
- Separate controls for top, bottom and front heat
- Independent operating decks
- Digital 60-minute timer per deck
- 1 3/8" insulation between decks
- Front of oven is stainless steel; Sides, back and top of oven are made of galvanized steel
- Oven chamber is constructed of heavy duty aluminized steel
- Rockwool insulation material – 4 3/4" thick layer around the oven chamber to make it economical on power
- Non-programmable digital controls
- Unit is supplied with legs and castors

Options

- Stone decks
- Built-in steam generator (add 1.8 kW per deck)
- Canopy (Type II Baking)
- Pull-out shelf
- Marine Package for cruise ships
- 8 5/8" high baking chamber
- 480 Volts
- Underbuilt proofer
- Steam inlet for use with steam source—3/8" NPT, PSI

Underbuilt Proofer Option


Sizes (commensurate with the oven)

12 pans @ 1.8kW - 22" high
18 pans @ 1.8kW - 29 1/4" high

Electrical Requirements

1ph/60hz/115v

Proofer to operate off of the oven's electrical supply of 1/60/115. Please add appropriate kW/amp load to find the overall power requirements for 115 circuit.

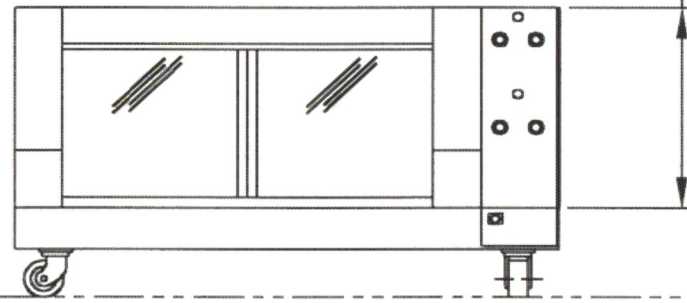

Digital Panel



Additional Information

- For optional canopy, add 7 1/2" to depth — add 1.8 kW/5 amps for each deck with steam generators
- Power connections are located in rear bottom right corner. Each oven comes completely pre-wired, allowing for one overall power connection
- Water connection is located in rear right corner. One water connection is required per deck.

Overall Oven Height

Low Crown (height)

Exterior: 13 3/8"
Interior: 6 1/2"

High Crown (height)

Exterior: 15 3/4"
Interior: 8 5/8"

Top Piece 4 3/8"

Bottom Piece 4 1/2"

Legs (all ovens):

1 deck: 36" legs + 5 3/8"
castor = 41 3/8"
2 deck: 28.1" legs + 5 3/8"
castor = 33 3/8"
3 deck: 16 1/4" legs + 5 3/8"
castor = 21 5/8"
4 deck: 4 1/2" legs + 5 3/8"
castor = 9 3/4"
5 deck: castor only = 5 3/8"

To find total overall height

Crown height
+
Top Piece
+
Bottom Piece
+
And Castors

Example
four deck oven

Two low crown 26 3/4"
Two high crown 31 1/2"
Top Piece 4 3/8"
Bottom Piece 4 1/2"
Legs and castor 9 3/4"

Total Height 78 7/8"

Technical Data

Model	# of Decks	# of Pans per Deck	Total Pan Capacity	Measurements				2 Electrical Connections Required			
				Exterior		Interior		1. Connection			2. Connection
				Width	Depth	Width	Depth	kW	*Full Load Amperage for the specified 3 phase 60 Hz Voltage		Single Phase Control Voltage Connection 115V/60 Hz
						220	480				
D-11	1	1	1	42.4"	47"	25"	32.25"	5	13.1	6	15 Amp
D-21	2	1	2	42.4"	47"	25"	32.25"	10	26.3	12	15 Amp
D-31	3	1	3	42.4"	47"	25"	32.25"	15	39.4	18.1	15 Amp
D-41	4	1	4	42.4"	47"	25"	32.25"	20	52.5	24.1	15 Amp
D-51	5	1	5	42.4"	47"	25"	32.25"	25	65.7	30.1	15 Amp
D-12	1	2	2	54.75"	47"	37.4"	32.25"	6.9	18.1	8.3	15 Amp
D-22	2	2	4	54.75"	47"	37.4"	32.25"	13.8	36.3	16.6	15 Amp
D-32	3	2	6	54.75"	47"	37.4"	32.25"	20.7	54.4	24.9	15 Amp
D-42	4	2	8	54.75"	47"	37.4"	32.25"	27.6	72.5	33.2	15 Amp
D-52	5	2	10	54.75"	47"	37.4"	32.25"	34.5	90.6	41.5	15 Amp
D-13	1	3	3	79.5"	47"	64.25"	32.25"	10.7	28.1	12.9	15 Amp
D-23	2	3	6	79.5"	47"	64.25"	32.25"	21.4	56.2	25.8	15 Amp
D-33	3	3	9	79.5"	47"	64.25"	32.25"	32.1	84.3	38.7	15 Amp
D-43	4	3	12	79.5"	47"	64.25"	32.25"	42.8	112.5	51.5	15 Amp
D-53	5	3	15	79.5"	47"	64.25"	32.25"	53.5	140.6	64.4	15 Amp
D-14	1	4	4	92"	47"	74.5"	32.25"	12.6	33.1	15.2	15 Amp
D-24	2	4	8	92"	47"	74.5"	32.25"	25.2	66.2	30.3	15 Amp
D-34	3	4	12	92"	47"	74.5"	32.25"	37.8	99.3	45.5	15 Amp
D-44	4	4	16	92"	47"	74.5"	32.25"	50.4	132.4	60.7	15 Amp
D-54	5	4	20	92"	47"	74.5"	32.25"	63	165.5	75.9	15 Amp
*Add the following amperage to the above total for each deck with steam								1.8	4.3	2	